


MC600

The Giant

- ◇ Up to 80 mt/h throughput
- ◇ Up to 80% energy saving
- ◇ low Powder Fraktion

Advantages:

- ◇ gentle, efficient processing of valuable raw material
- ◇ homogenous ground product
- ◇ no material heating
- ◇ compact design
- ◇ PLC-capable integration

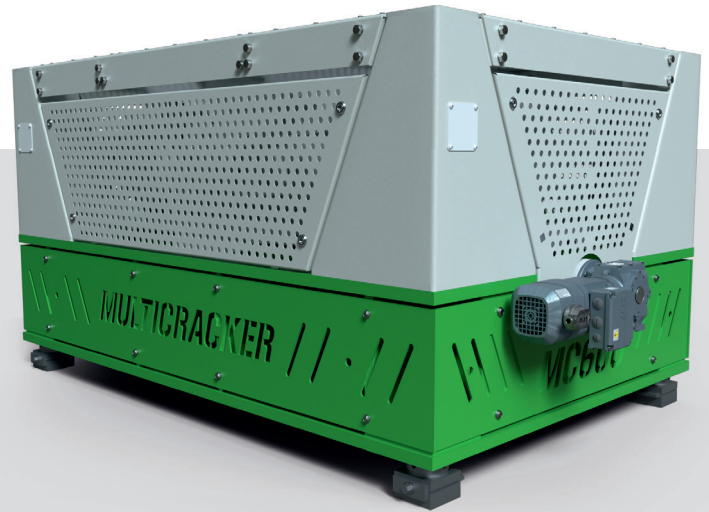

STANDARD-CONFIGURATION

- Electrical stepless adjustment of the grinding gap
- Controls/switch cabinet not included
- Quick change of cracker unit
- Enclosed crackerunit
- Foreign object protection by spring technique
- Incl. one crackerunit/grinding unit
- Disk profile of your choice
- Vibration damping mounting feed, bearing temp. sensors
- EC-conform, ATEX certified (zone 22)

TECHNICAL DATA / SPECIFICATIONS

- Input chute: 600 x 500 mm
- Output chute: 600 x 500 mm
- Outer dimensions: (see drawing)
- Driving power: 2x 30 kW
- Weight: 3900 kg

MAKOBA GmbH & Co.KG
Lochfeldstr. 28
D-76437 Rastatt

Tel +49 7841 67197-0
vertrieb@makoba.de

IDEAL AREAS OF APPLICATION

- Corn
- Soybeans
- Poultry feed
- Wet corn
- Wheat
- Rapeseed
- Mesh feed

...and much more

